

Dynapac D25T

Highway pavers



- Lower TCO with rugged design and extended wear parts life
- Award winning Mat Master screed for high quality results
- Simplified smart paving with Dynapac PaveManager
- iTrack system providing excellent traction & reliability
- Innovative solutions for non-stop paving (Safe Impact, Fail Safe heating)
- Designed and built in USA for North American Market

Technical Data

 Masses	
Weight	14.33 t
Tractor weight including Mat Master screed	17.21 t

 Capacity	
Transport width	2.7 m
Total length	6.4 m
Transport height	3.2 m
Max working width	6 m
Basic screed width	2.4 m
Placement thickness (max)	305 mm

 Undercarriage	
Track length	2.5 m
Track width	0.35 m
Drive	Hydrostatic final drivers, integrated in track frame
Paving speed	up to 86 m/min
Transport speed	up to 15 km/hr

 Engine	
Manufacturer/Model	Cummins QSB 4.5
Rated power	129 kW @ 2200 Rpm
Emissions according to	Tier 4f
Electrical system	12 V / 130 Amp
Fuel tank capacity	180 l

 Material hopper	
Capacity	10 t
Hopper width	3.14 m
Dumping height	0.54 m

 Conveyor	
Conveyor type	Dual bar feeder
Conveyor width	2 x 552 mm
Conveyor control	2 independent conveyors with proportional speed control
Reversible	Yes

 Auger	
Auger diameter	432 mm
Auger control	2 independent augers with proportional speed control
Auger height adjustment	Hydraulic
Reversible	Yes

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.


dynapac_d25t_en-20220225.110555.pdf 2022-02-25 11:05

Dynapac D25T


Highway pavers



Technical Data

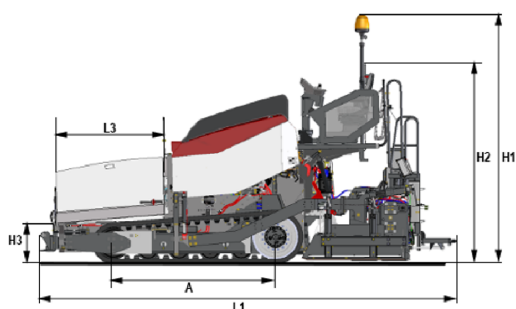

Dimensions	
A. Axle track	2515 mm
B1. Width, max.	3454 mm
B2. Width, standard	2769 mm
B3. Width, center of tracks	2007 mm
H1. Height, max.	3531 mm
H2. Height, transport	3200 mm
H3. Height Dumping	559 mm
C1. Track width	356 mm
L1. Length	6477 mm
L3. Length, hopper	1803 mm

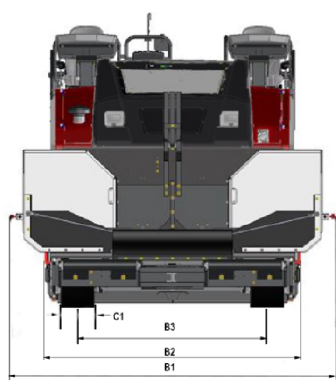

Suitable screeds						
Model	Basic width	Hydr.Extendable up to	Working width, max.	Compacting elements	Heating system	Weight
Mat Master 16R	8 ft	16 ft	20 ft	Vibration	Electric	N/A

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_d25t_en-20220225.110555.pdf 2022-02-25 11:05