

Dynapac D30W

US Highway pavers



- Lower TCO with rugged design and extended wear parts life
- Award winning Mat Master screed for high quality results
- Simplified smart paving with Dynapac PaveManager
- Dynamic Suspension control (DSC) for excellent traction
- Innovative solutions for non-stop paving (Safe Impact, Fail Safe heating)
- Designed and built in USA for North American Market

Technical Data

 Masses	
Weight	15.33 t
Tractor weight including Mat Master screed	18.91 t

 Capacity	
Transport width	3.3 m
Total length	7.1 m
Transport height	3.0 m
Max working width	9.14 m
Basic screed width	3 m
Placement thickness (max)	305 mm

 Undercarriage	
Rear wheels	Sand Rib 18.00 -25
Front wheels	4 X 406 X 559 mm
Drive	Hydrostatic with gearbox reduction
Paving speed	up to 93 m/min
Transport speed	up to 16 km/hr

 Operation	
Operator console	Dual Swing out operator consoles
Dashboard	2 fully functional tractor consoles with display

 Engine	
Manufacturer/Model	Cummins QSB 6.7
Rated power	168 kW @ 2200 rpm
Emissions according to	Tier 4f
Electrical system	12V/130 Amp
Fuel tank capacity	265 l

 Material hopper	
Capacity	16.70 t
Hopper width	3.37 m
Dumping height	559 mm

 Conveyor	
Conveyor type	Dual bar feeder
Conveyor width	2 x 565 mm
Conveyor control	2 independent conveyors with proportional speed control
Reversible	Yes

 Auger	
Auger diameter	432 mm
Auger control	2 independent augers with proportional speed control
Auger height adjustment	Hydraulic
Reversible	Yes

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.


dynapac_d30w_en-20220725.114245.pdf 2022-07-25 11:42

Dynapac D30W


US Highway pavers



Technical Data

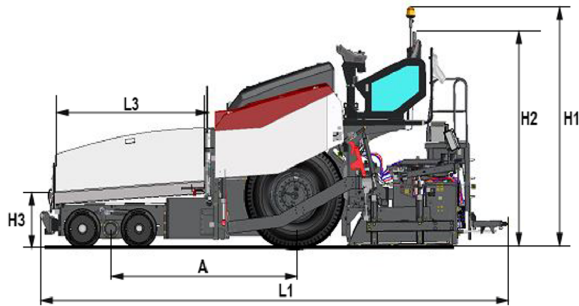

Dimensions	
A. Wheelbase	2819 mm
B1. Width, max.	3378 mm
B2. Width, standard	3378 mm
B3. Width, wheel track	2896 mm
H1. Height, max.	3429 mm
H2. Height, transport	3073 mm
H3. Height	546 mm
L1. Length	7163 mm
L3. Length, hopper	2438 mm
W1. Width, front wheels	406 mm
W2. Width, rear wheels	508 mm

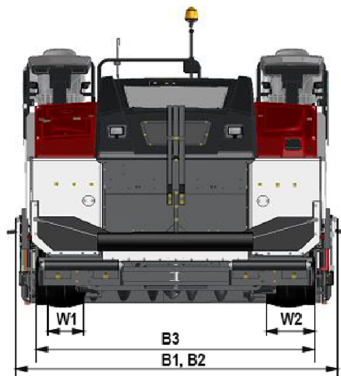

Suitable screeds						
Model	Basic width	Hydr. Extendable up to	Working width, max.	Compacting elements	Heating system	Weight
Mat Master 20R	3.05 m	6.09 m	9.14 m	Vibration	Electric	3583 lbs

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_d30w_en-20220725.114245.pdf 2022-07-25 11:42