



Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



Technical Data

Material Hopper

Capacity	2.5 m³ (5.5 t)
Dumping height, center	570 mm
Hopper width, internal	2760 mm

Conveyor

Conveyor width	620 mm
----------------	--------

Engine

Manufacturer /Model	Deutz TD2.9 L4
Emissions according to	EU Stage V /EPA Tier 4f
Rated power	55.4 kW @ 2200 rpm
Electrical system	2 x 12V, 72Ah
Fuel tank capacity	85 l

Engine

Manufacturer /Model	Deutz TD2.9 L4
Emissions according to	EU Stage III /EPA Tier 3
Rated power	55.4 kw /54 kw @2200 rpm

Traction

Transport speed	3.3 km/h
-----------------	----------

Dimensions

Basic width	1.20 m
Working width, max.	3.50 m
Working width, hydraulic extendable	2.40 m
Working width, minimum (with reducing shoe)	0.50 m
Front ramp angle	14°

Masses

Weight	7.0 t
--------	-------

Capacity



Paving thickness (max/min)	200 /-150 mm
Theoretical placement capacity	300 t/h

Undercarriage

Crawler length	1400 mm
Crawler width	200 mm

Compact pavers


Dimensions

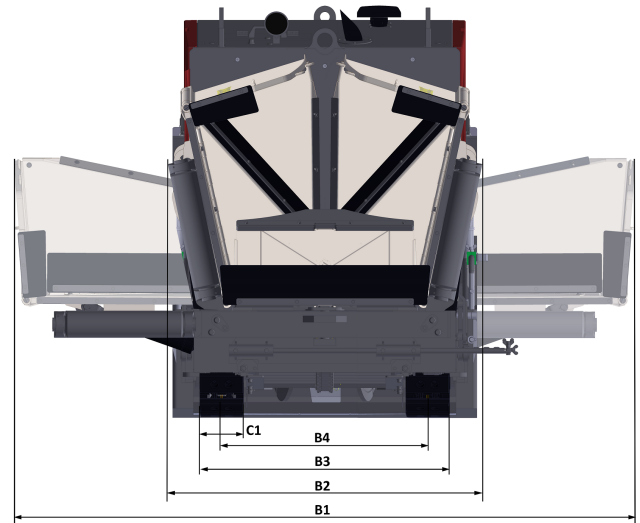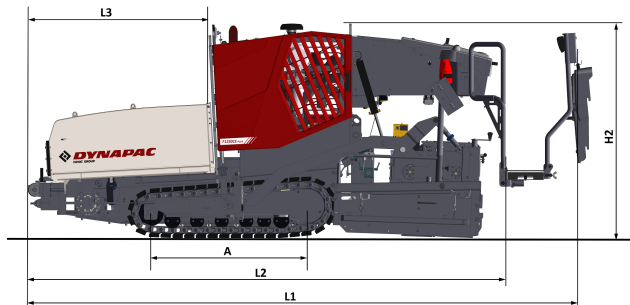


Dimensions

A. Axle track	1400 mm
B1. Width, max.	2820 mm
B2. Width, transport (with main screed)	1450 mm
B3. Width, external track	1140 mm
B4. Width, center of tracks	940 mm
C1. Track width	200 mm
H2. Height, transport	2020 mm
L1. Length, total	4790 mm
L2. Length, transport	4380 mm
L3. Length, hopper	1605 mm

Screeds

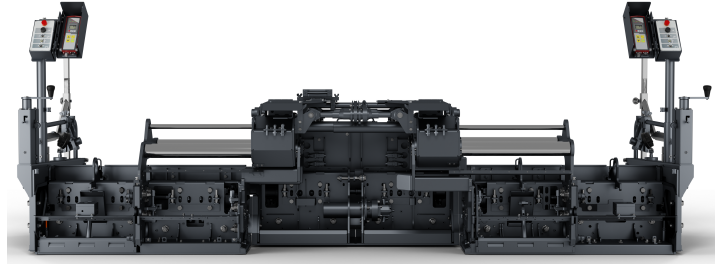

V2400 TV / TVE

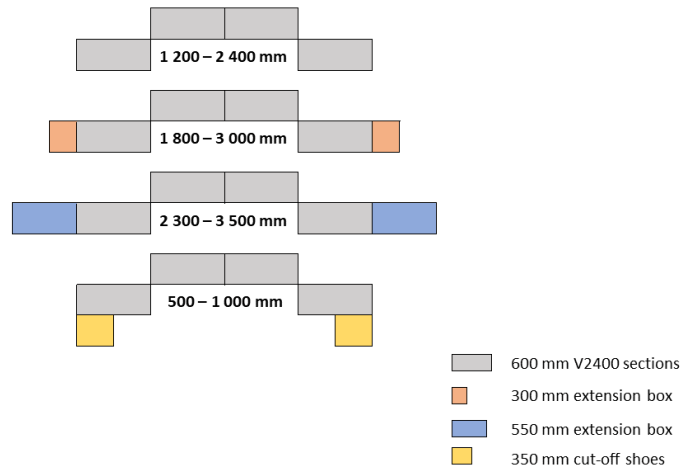

© 2015 DYNAPAC